


Ugelli Airless compatibili


Compatible Airless noozles



Portata (L/min) a 100 bar	Taglia	Angolo di spruzzo	COD.
2,30	corto	65°	6501
3,40	corto	65°	65015
4,60	corto	65°	6502
6,80	lungo	65°	6503
9,10	lungo	65°	6504
11,40	lungo	65°	6505
0,57	corto	80°	800025
3,40	corto	80°	80015
4,60	corto	80°	8002
6,80	lungo	80°	8003
9,10	lungo	80°	8004
11,40	lungo	80°	8005
13,70	lungo	80°	8006
0,89	corto	95°	950039
1,50	corto	95°	950067
1,80	corto	95°	950080
2,30	corto	95°	9501
3,40	corto	95°	95015
4,60	corto	95°	9502
6,80	lungo	95°	9503
9,10	lungo	95°	9504
11,40	lungo	95°	9505
13,70	lungo	95°	9506
0,75	corto	110°	1100033
0,89	corto	110°	1100039
1,10	corto	110°	1100050
1,50	corto	110°	1100067
2,30	corto	110°	11001
4,60	corto	110°	11002
6,80	lungo	110°	11003
9,10	lungo	110°	11004
11,40	lungo	110°	11005
16,00	lungo	110°	11007
18,20	lungo	110°	11008

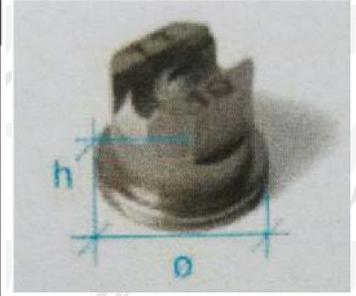

Taglia CORTO
h = 9,5 mm - Ø = 15 mm

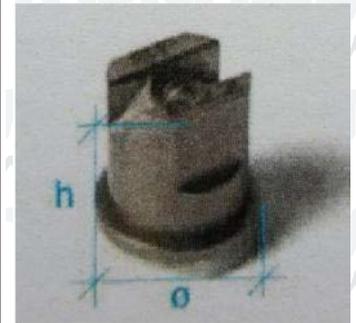

Taglia LUNGO
h = 12,5 mm - Ø = 15 mm



ACCESSORI - ACCESSORIES

Tubetto supporto ugello
Nozzle support

Ghiera di fissaggio
Fixing ferrule

